


Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
SITE - FC @ GRADE	+	2.1 fc	7.9 fc	0.1 fc	79.0:1	21.0:1
PROPERTY LINE - FC @ GRADE	X	0.0 fc	0.2 fc	0.0 fc	N/A	N/A

Schedule										
Symbol	Label	Quantity	Manufacturer	Catalog Number	Description	Lamp	Filename	Lumens Per Lamp	Light Loss Factor	Wattage
SA	SA	18	LITHONIA LIGHTING	DSX0 LED P4 30K 80CRI TFTM MVOLT SPA HS (FINISH) / SSS 12.5' WZ.5' BASE	AREA LUMINAIRE WITH P4 PERFORMANCE PACKAGE - TYPE FTM WITH HOUSESIDE SHIELD	LED - 3000K	DSX0_LED_P4_30K_80_CRI_TFTM_HS.ies	8309	0.91	93.04
SB	SB	2	LITHONIA LIGHTING	DSX0 LED P4 30K 80CRI T3M MVOLT SPA HS (FINISH) / SSS 12.5' WZ.5' BASE	AREA LUMINAIRE WITH P4 PERFORMANCE PACKAGE - TYPE 3M	LED - 3000K	DSX0_LED_P4_30K_80_CRI_T3M.ies	9685	0.91	93.04
SC	SC	56	LITHONIA LIGHTING	WDGE2 LED P2 30K 80CRI T3M MVOLT SRM (FINISH)	WALL MOUNT WITH P2 PERFORMANCE PACKAGE - TYPE 3M	LED - 3000K	WDGE2_LED_P2_30K_80CRI_T3M.ies	1964	0.91	18.9815
SD	SD	8	LITHONIA LIGHTING	WDGE2 LED P2 30K 80CRI TFTM MVOLT SRM (FINISH)	WALL MOUNT WITH P2 PERFORMANCE PACKAGE - TYPE FTM	LED - 3000K	WDGE2_LED_P2_30K_80CRI_TFTM.ies	1934	0.91	18.9815
SFE	SFE	12	GOTHAM LIGHTING	EVO4SC 30/10 AR WD LSS MVOLT GZ10 (MOUNTING) E10WCP WL (FINISH)	EVO 4IN ROUND CYLINDER, WET LOCATION SURFACE CEILING MOUNT, 80 CRI, 3000K, 1000LM, WIDE DIST, CLEAR SEMI-SPEC W/EM BATTERY PACK	LED - 3000K	EVO4SC_30_10_AR_WD_LSS.ies	624	0.91	8.8

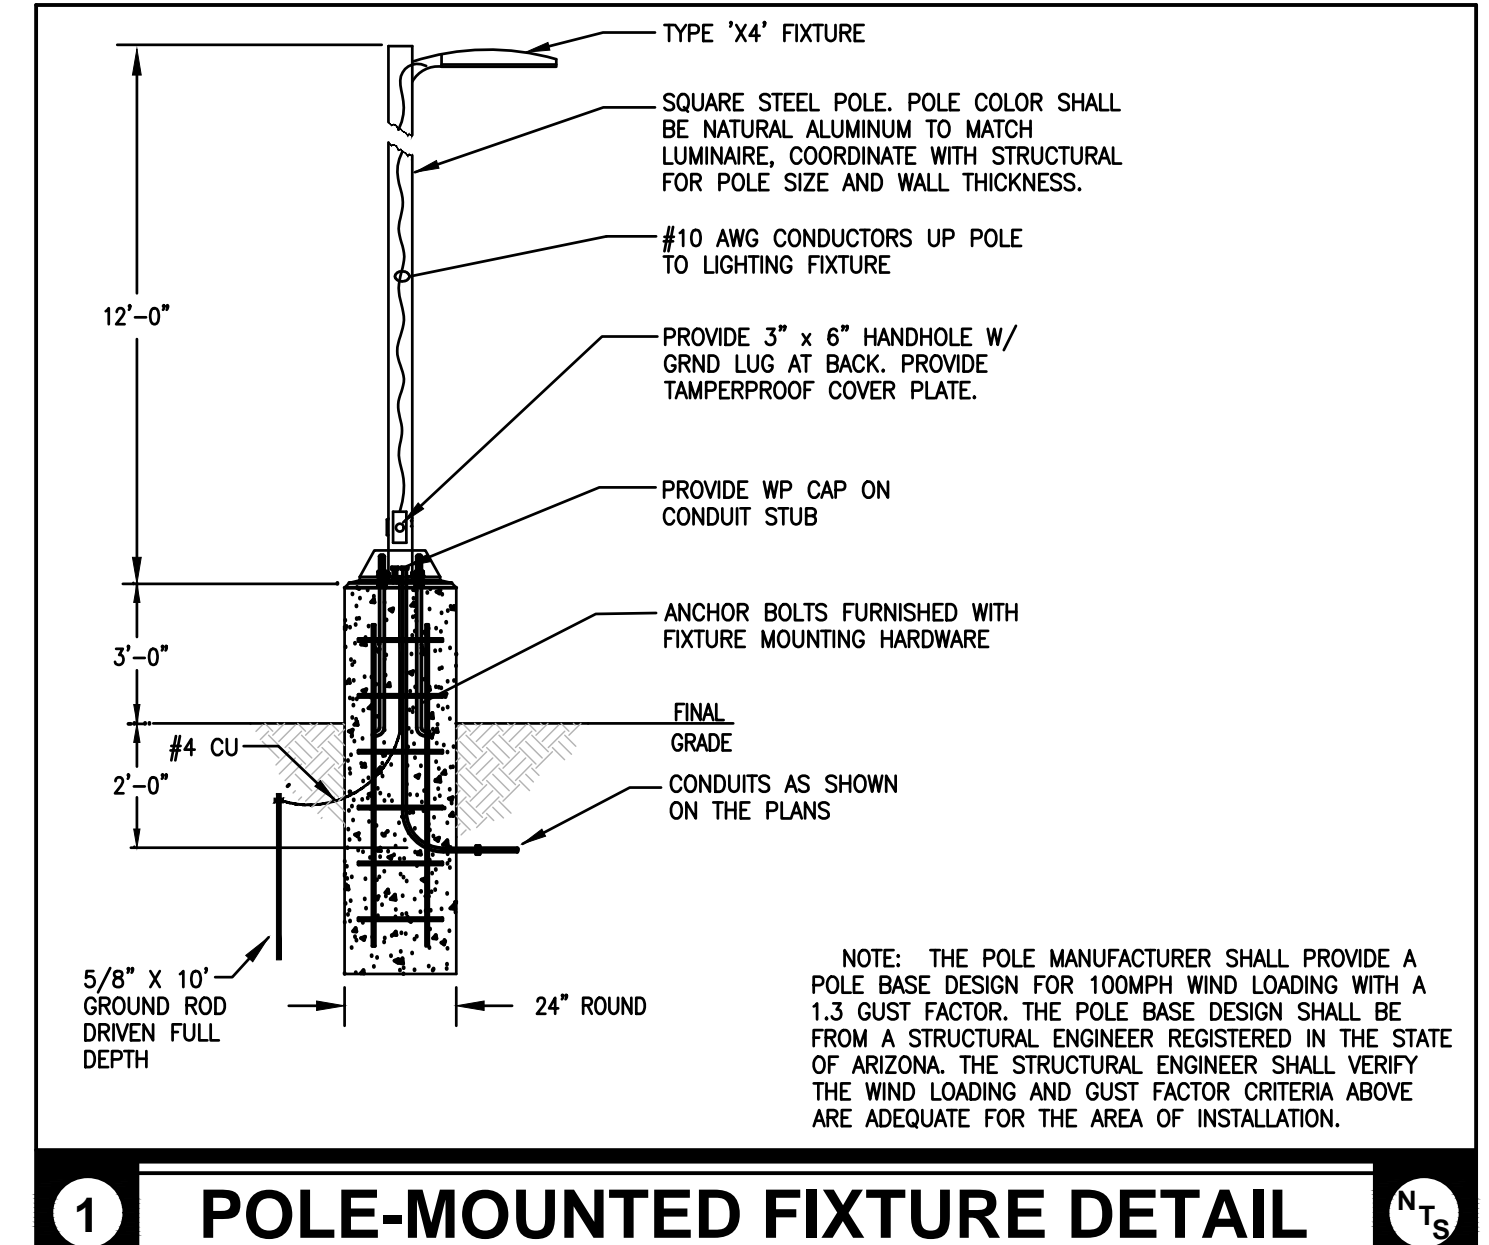

**ASEIENGINEERING** 2410 W. ROYAL PALM RD. SUITE A, PHOENIX, AZ 85027  
 602.287.0300 F 602.287.0600  
 THESE DRAWINGS AND ASSOCIATED DOCUMENTATION CONTAIN INFORMATION, DESIGN, CONCEPTS, AND DATA THAT ARE THE SOLE PROPERTY OF ASEI ENGINEERING, INC. THIS INFORMATION MAY NOT BE USED FOR ANY PURPOSE OTHER THAN ORIGINALLY INTENDED WITHOUT THE EXPRESSED WRITTEN CONSENT AND PERMISSION OF THE ENGINEER AND ASEI ENGINEERING, INC.

DFT: KR  
 DSN: KR  
 CHK: SA

PHOTOMETRIC PLAN FOR A NEW DEVELOPMENT 26026 S. ELLSWORTH RD. QUEEN CREEK, AZ 85142  
 PRELIMINARY

**PHOTOMETRIC PLAN**  
 SHEET PH-1  
 OF

